

Baseband RGB Adapter


A



Description

MFICOS Video RGB Adapters is designed for baseband video RGB signal transmission utilizing Category 5 UTP (Unshielded Twisted-Pair) cable. which can be used for all RGB (Red/Green/Blue) Video monitors. Signal distortion is minimized from the received signal. Expensive video cable is no longer necessary with a RGB Adapter from MFICO. Simply install or use existing Category 5 UTP cable for your next installation

Application Diagram

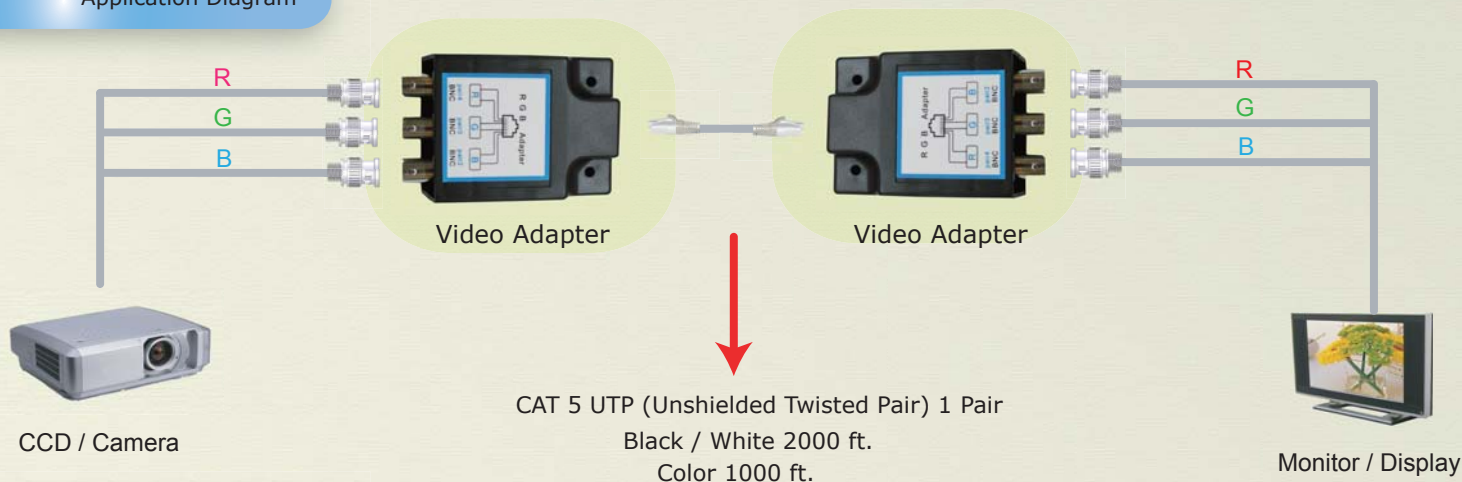

SPECIFICATIONS

RJ-45 Signal:	Video R Pair 4- Pins 7 & 8 . Video G Pair 3- Pins 3 & 6.
	Video B Pair 2- Pins 1 & 2
Impedance:	100 ohm Balanced Video
Bandwidth:	Video DC-12 MHz. Audio 50Hz-15KHz (Optional)
Distance:	Color video UTP Category 5 cable Maximum length 1,000 ft.
	B/W Video UTP Category 5 cable Maximum length 2,000 ft.
Enclosure:	Black PVC
Dimensions:	2.2" (W) x 3.03" (L) x 0.98" (H)

Item Number	Description
MF-076	Baseband RGB Adapter