



Baseband Video/Audio Adapter

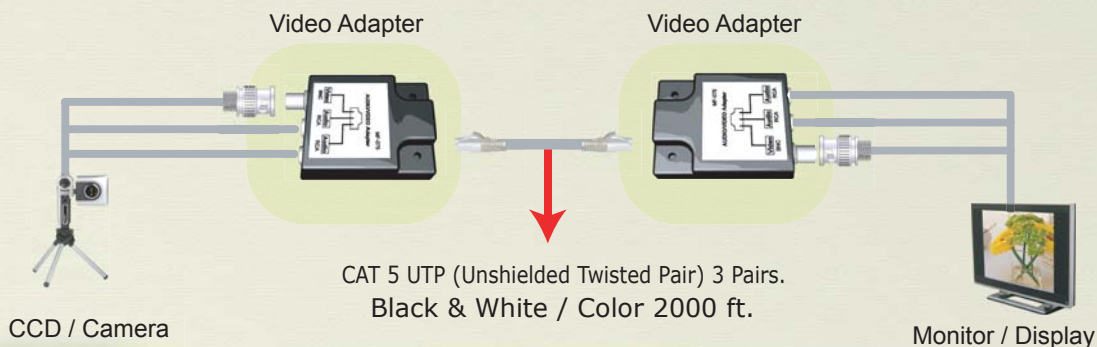

Application Diagram

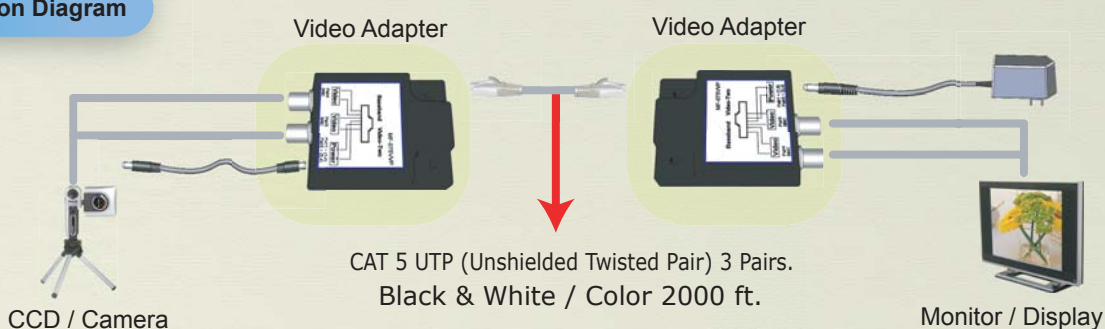

SPECIFICATIONS

RJ-45 Signal:	Video 1xBNC Female(S-Video) connector. Audio 2xRCA jack connector
	Video Pair 4- Pins 7 & 8 Video . Audio L Pair 3- Pins 3 & 6 . Audio R Pair 2- Pins 1 & 2
Impedance:	Video 100 ohm Balanced. Audio 600 ohm Balanced
Bandwidth:	Video DC-12 MHz. Audio 50Hz-15KHz (Optional)
Distance:	Color video UTP Category 5 cable Maximum length 1,000 ft.
	B/W Video UTP Category 5 cable Maximum length 2,000 ft.
Enclosure:	Black PVC
Dimensions:	2.2" (W) x 3.03" (L) x 0.98" (H)

Item Number	Description
MF-075	Baseband A/V Adapter Video/Audio
MF-075V	Baseband A/V Adapter Video Only
MF-075-VAP	Baseband A/V Adapter Video /Audio with Power Jack
MF-075S	S-video only Adapter
MF-075SV	S-video Audio(Stereo) Adapter
MF-075-VP	Baseband Video only with Power Jack
MF-075-VVP	Baseband Video 2 port with Power Jack
MF-075-R3	Baseband A/V Adapter with RCA Jack (Y+W+R)
MF-075-V3	Baseband Video Adapter with RCA Jack (R+B+G)